
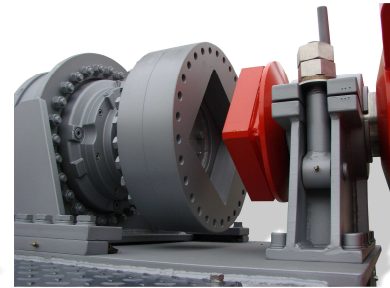


## Winding machine VEN-P

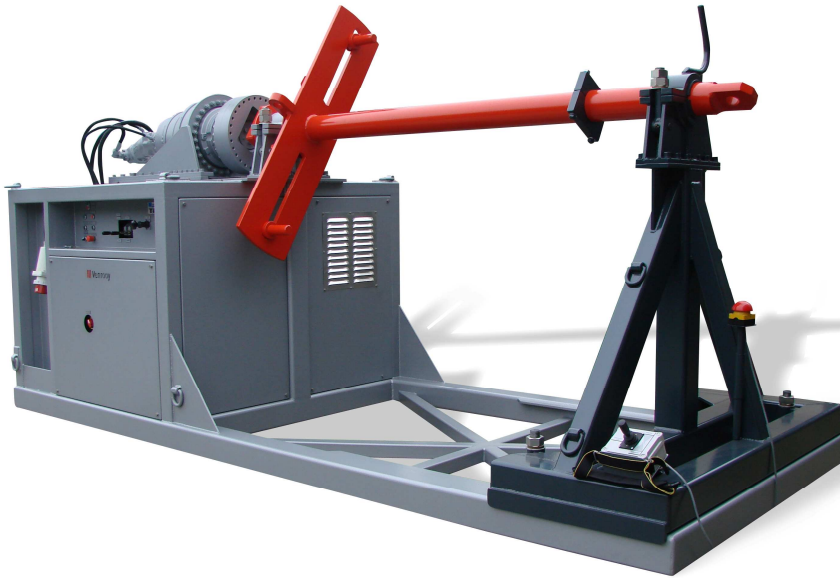

Hydraulically controlled coupling

- Load carrying cap. : 10—15—25—40—60—80—100—120—150 tons
- Various line-pulling / braking tensions : 10.000—150.000 Nm (on a diameter of 1.000mm : 2—5—8—12—16—20—24—30 tons)
- Tension system : unwinding with hydraulically adjustable tension on the wire rope
- Max. drum dimensions according to client demands
- Compact electrical driven hydro unit with electrical start
- 2 directions : winding/unwinding
- Stepless speed control, 0—5 r.p.m.
- Hydromotor constructed on a compact inline reduction gear, supplied with a hydraulic brake for the necessary braking- and back tension
- Drum shaft with hydraulically controlled coupling
- Remote control
- CE- marking

### Options :

- Diesel instead of electrical drive
- Diesel AND electrical drive
- Wireless remote control
- Extra drum shafts for different carrying capacities

Venrooy Cable Equipment  
Simon Homburgstraat 12  
5430 AB Cuijk  
The Netherlands  
**F** +31 (0)485-33 60 20  
**E** info@venrooy.nl  
**W** www.venrooy.nl